

INSTEON®



Assurance Kit Quick Start Guide

INSTEON Starter Kit

Status LED



Idle / Linking



Unlinking



Factory Reset

Power



Ethernet Port




Ethernet
Cable



Power
Cable

Setup Your Kit


- 1 Connect the Hub to power and your internet router using only the cables provided.

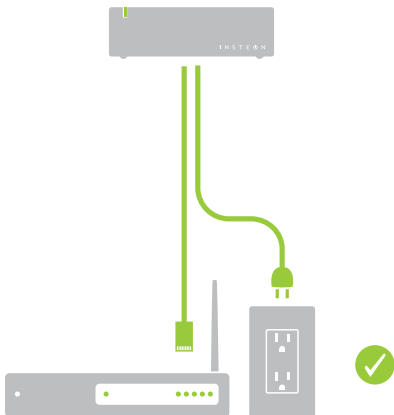

Avoid power strips and switched outlets

2


Download and install the latest INSTEON for Hub App from your device's app store.

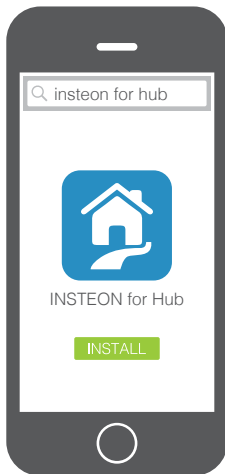

Scan the QR Code and
tap your store.

3


Connect to the same network as the INSTEON Hub and launch the App. Create a new account.

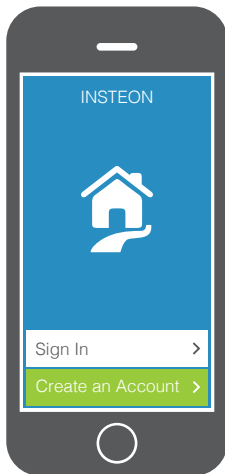

Add Devices

4

Follow the on-screen instructions to add your devices.

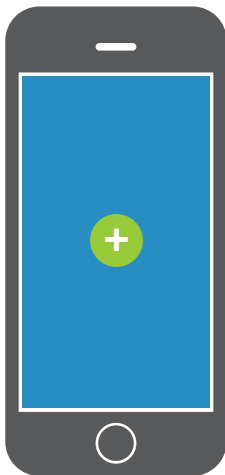

For additional documentation, visit:
insteon.com/support

On/Off Module




On



Off

Status LED

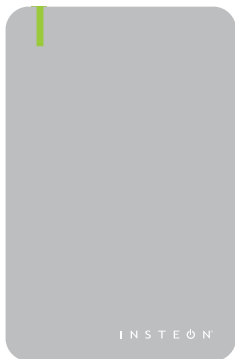

— On

— Off

— Set Button





Up to 1,800W/15A maximum load



Learn more about On/Off Module
insteon.com/onoffmodule-qsg

Open/Close Sensor

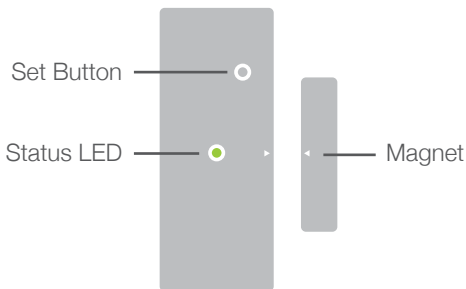


(Cover Removed)




Learn more about Open/Close Sensor
[insteon.com/openclosesensor-qsg](https://www.insteon.com/openclosesensor-qsg)

Motion Sensor



Wall Mount
Retention Slot

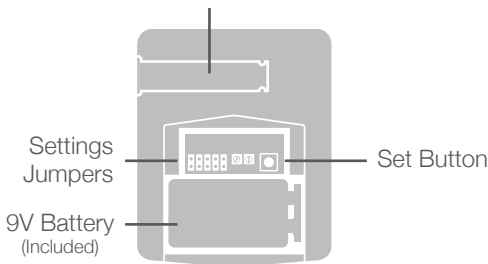


(Cover Removed)



Learn more about Motion Sensor
[insteon.com/motionsensor-qsg](https://www.insteon.com/motionsensor-qsg)

Leak Sensor

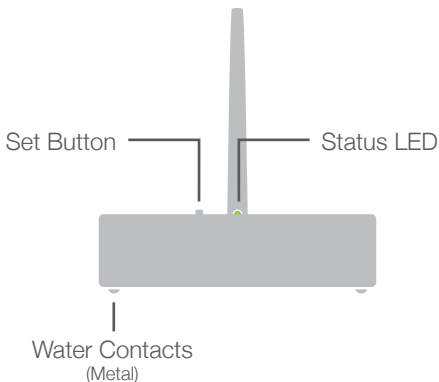

AA Battery
(Included)



(Cover Removed)



Learn more about Leak Sensor
[insteon.com/leaksensor-qsg](https://www.insteon.com/leaksensor-qsg)

Remote Access

You can monitor and control your devices when away if you setup Remote Access.



We're here to help. Contact INSTEON Support at 866.243.8022.

Create a Schedule

Schedules can be set for individual devices or entire scenes. Go to Settings and tap Schedules.

